

GPS Platform Management--Distributor

- 1. Platform user have 2 types: End user & Distributor, end user account is used by end customer, it only can operate and check user's own tracking device, the operation please refer the platform operation guide. Distributor account is used by agents and distributors, it can manage the tracking device under own account, such as: create new end user & fleet user, reset password, move device to specify user, update expired date, monitor any device under own account, etc. And this manual is only suit for distributor user.**
- 2. The tracking devices have been added to distributor's account before shipping, and the distributor can not add device itself, distributor only can operate the device under own account, such as: create new end user & fleet user, reset password, move device to specify user, update expired date, monitor any device under own account, etc. The tracking device is active by uploading tracking to website, after active the device is given 1 year expiry date automatically, if the device is given life time free platform service charge, the expiry date will be over 10 years, if the device is given 1 year expiry date, then the distributor can update the expired date later.**
- 3. Note: Before shipping please select your device is life time free platform service charge or only 1 year free platform service charge, the default is life time free service charge, otherwise you need contact us later to delete the device and re-add the device later, this maybe delay 2-3 days.**


Note: in the following "Click" means click once with mouse left button.

Distributor Account Login

Visit: www.999gps.net with PC, the login page will display, this login page is same with the normal end user login page, language can be selected:




Input the distributor account name and password and click “Login”, the system management page will display, it is different with end user, the end user will go to monitor page directly. At this system management page, distributor can operate own device , also can go to the monitor page to check the end user device.

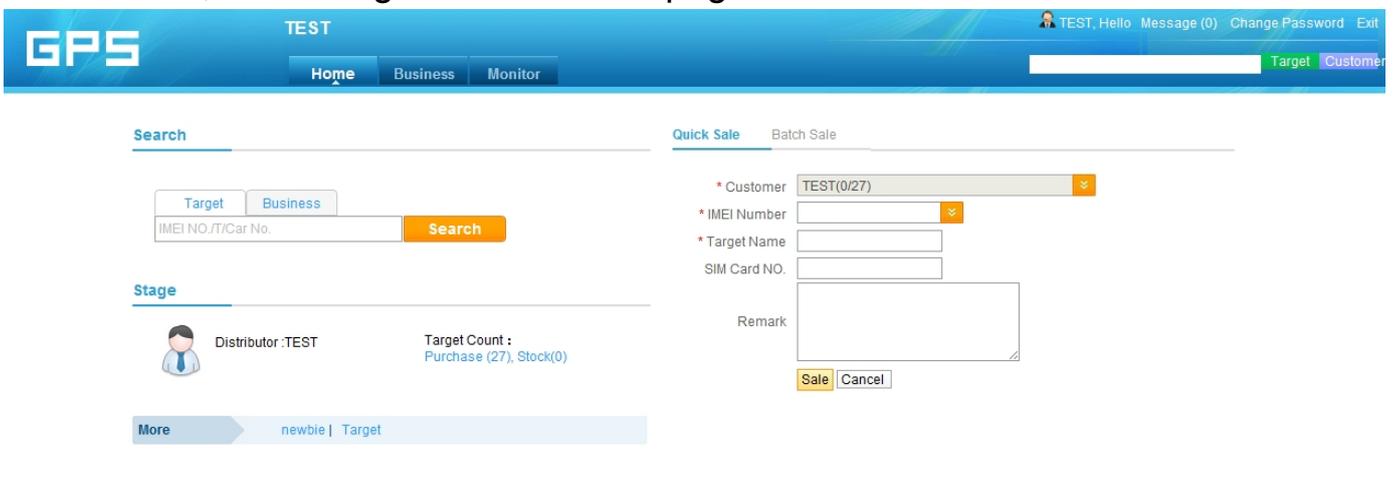


Quick Search

You can search the customer account or device in the right top corner frame or the middle left search frame.

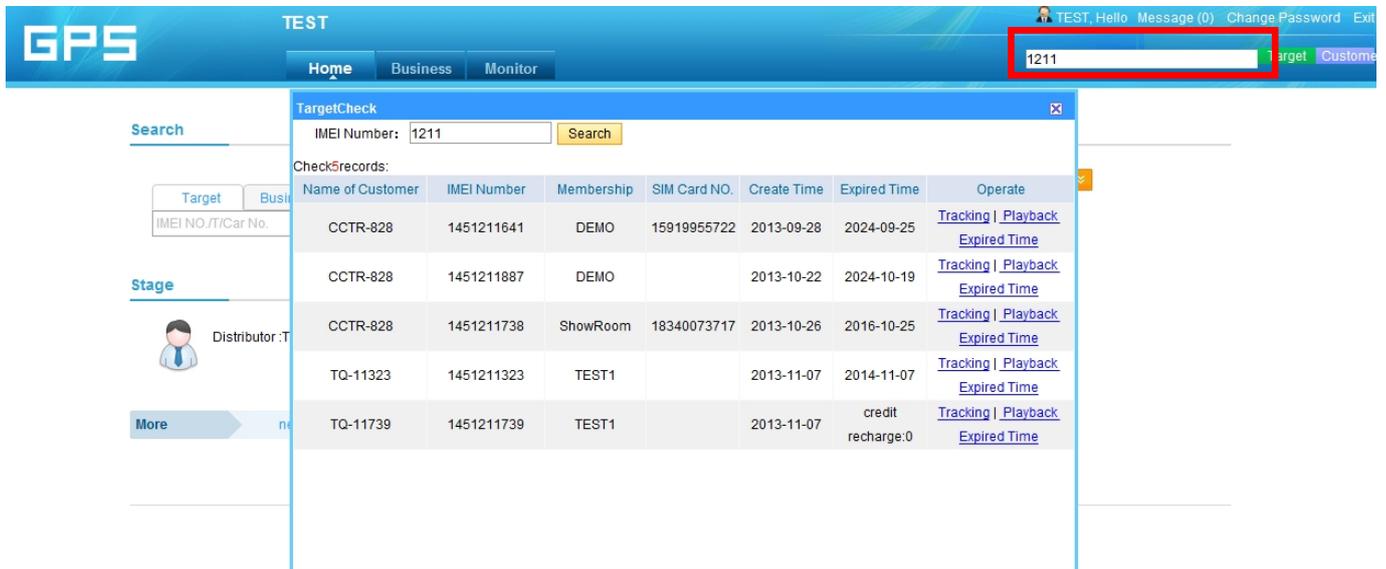

The screenshot shows the GPS system interface with a search for IMEI number 1211. The search results are displayed in a table within a pop-up window titled "TargetCheck".

Name of Customer	IMEI Number	Membership	SIM Card NO.	Create Time	Expired Time	Operate
CCTR-828	1451211641	DEMO	15919955722	2013-09-28	2024-09-25	Tracking Playback Expired Time
CCTR-828	1451211887	DEMO		2013-10-22	2024-10-19	Tracking Playback Expired Time
CCTR-828	1451211738	ShowRoom	18340073717	2013-10-26	2016-10-25	Tracking Playback Expired Time
TQ-11323	1451211323	TEST1		2013-11-07	2014-11-07	Tracking Playback Expired Time
TQ-11739	1451211739	TEST1		2013-11-07	credit recharge:0	Tracking Playback Expired Time

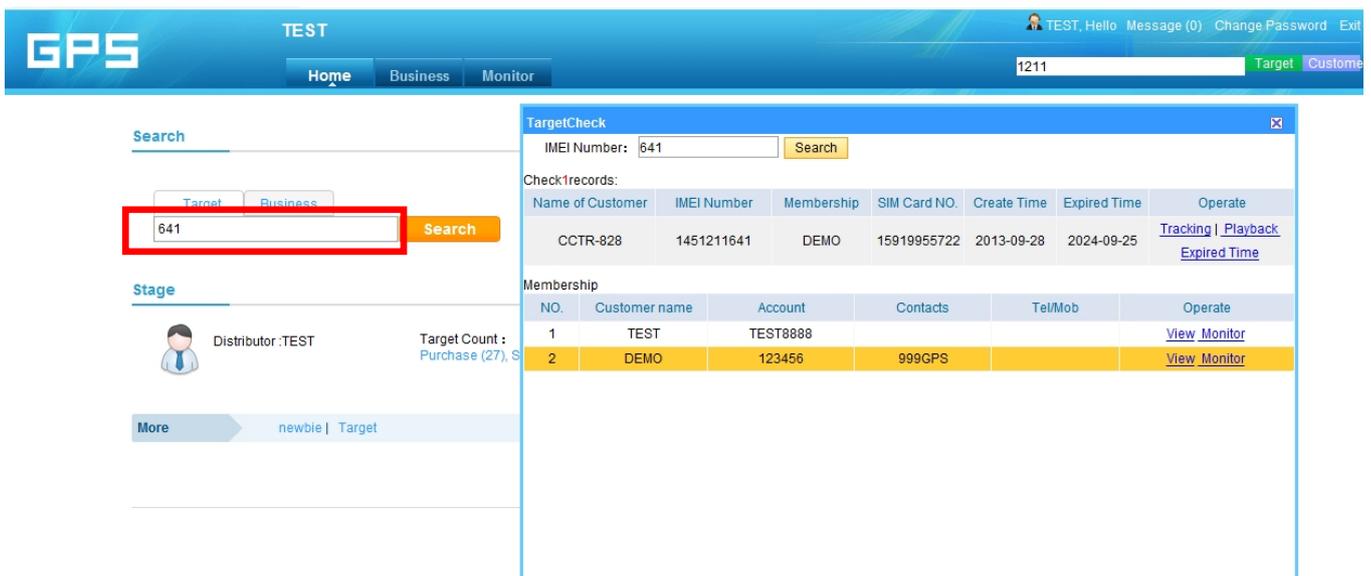

The screenshot shows the GPS system interface with a search for IMEI number 641. The search results are displayed in a table within a pop-up window titled "TargetCheck".

Name of Customer	IMEI Number	Membership	SIM Card NO.	Create Time	Expired Time	Operate
CCTR-828	1451211641	DEMO	15919955722	2013-09-28	2024-09-25	Tracking Playback Expired Time

Membership

NO.	Customer name	Account	Contacts	Tel/Mob	Operate
1	TEST	TEST8888			View Monitor
2	DEMO	123456	999GPS		View Monitor

Note: In the search frame input the key word or digital word, click the "Search" menu, the pop up window will display the search result, after you search the device, you can operate the device, for example move to other user account or fleet, reset password to 123456, update expired date, change the account setting, tracking this device, check history tracking etc.

Business Page

Click the “Business” on the top menu bar, the business page will display, the page is as follow:

The screenshot displays the GPS Business Page interface. The top navigation bar includes 'Home', 'Business', and 'Monitor'. The left sidebar shows a 'customer List' with a red box highlighting 'DEMO(7/27)'. The main content area shows details for the 'DEMO' customer, including login account (123456), roles (End User), target count (Stock 7, Purchase 27), and contact information (999GPS). Below this is a table of target devices.


NO.	Target Name	IMEI Number	SIM Card NO.	Type	Create Time	Activation Time	Expired Time	Operate
1	CCTR803	CW1111C00000003	18340061589	CC800	2013-09-28	2013-09-28	2024-09-25	Sale Edit More
2	CCTR-828	1451211641	15919955722	TQ	2013-09-28	2013-09-28	2024-09-25	Sale Edit More
3	CCTR-808S	CW8888C88998888	18340046296	CC800	2013-10-02	2013-10-02	2024-09-29	Sale Edit More
4	CCTR-828	1451211887		TQ	2013-10-22	2013-10-22	2024-10-19	Sale Edit More
5	TR828-NEW	1451210915	18340062829	TQ	2013-11-07	2013-11-22	2014-11-22	Sale Edit More
6	CCTR-820-FX	1451210909	18340073732	TQ	2013-11-07	2013-11-07	2024-11-04	Sale Edit More
7	CCTR-820-HG	1451210874	18340046791	TQ	2013-11-14	2013-11-21	2014-11-21	Sale Edit More

The left window is a customer list, this will list all the customer under the distributor account, click the customer name in the list, the customer detail information will display in the right window. Including device information, sub-account information, the distributor account information etc.


Note: the distributor account contact information can be display to sub-account, please fill your Contact name / Telephone or mobile phone number / Address, if this information is not filled, maybe the sub-customer can not find distributor to pay for charging & updating expired time.

Customer List

All the customer under this distributor will display in the list. Click the name of customer, the sub-customer will display, including how many device under this customer.

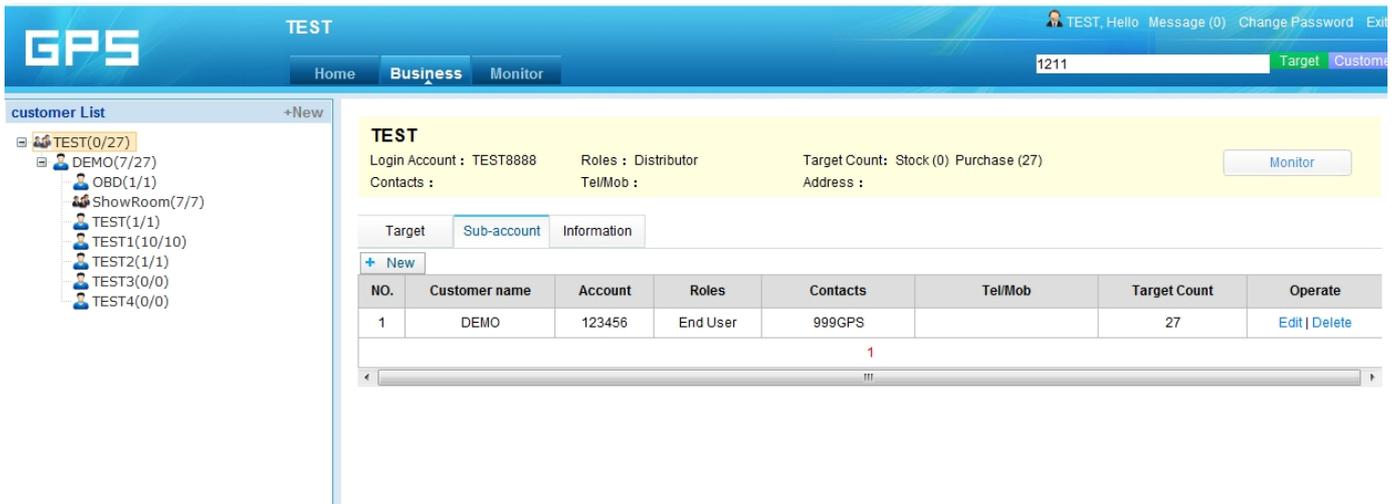

Add New Customers

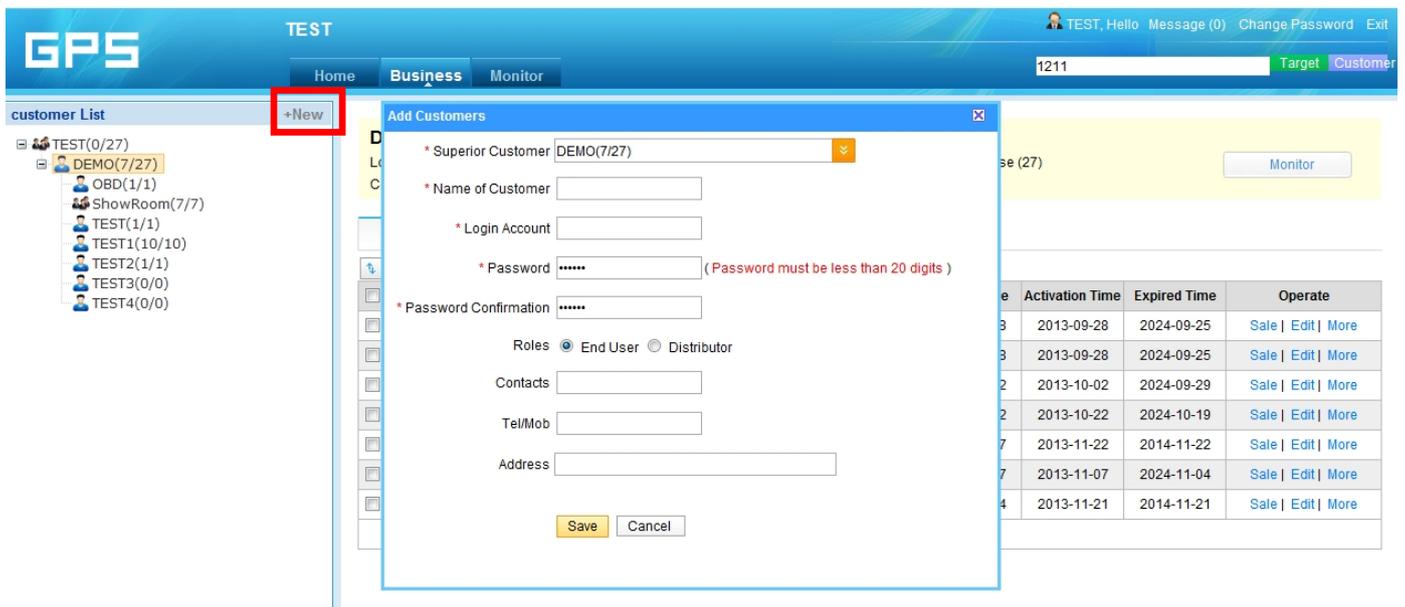

Click the “+New” on the right top corner of the customer list window, an “Add Customers” menu will pop up, select the upper account name you will add, for example add a new customer under DEMO account, you should select the superior customer is DEMO, name of customer is the display name in the left customer list, the login account is the login name of this customer (the name of customer and the login name can be different), the default password is 123456, the roles can be select end user (End user only can operate own device) or distributor (Sub-distributor, can management the device under the sub-account), and the contacts / tel/Mob / Address is the new customer contact information, Click “save”

will create the new customer. After create a new customer, move a device to this customer, this customer can tracking this device.

Customer Management

Click once the customer name in the left window with mouse right button, a menu will pop up, Add customer / Manage Customer / Delete Customer / Reset Password menu will display. Click these menu can operate the command.

The screenshot shows the GPS system interface. On the left, a 'customer List' sidebar shows a tree view with 'DEMO(7/27)' selected. A right-click context menu is open over 'DEMO', with options: 'Add Customer', 'Manage Customer', 'Delete Customer', and 'Reset Pwd'. The main area displays the 'DEMO' customer details: Login Account: 123456, Roles: End User, Target Count: Stock (7) Purchase (27), Contacts: 999GPS, Tel/Mob: , Address: . Below this is a table of targets with columns: NO., Target Name, IMEI Number, SIM Card NO., Type, Create Time, Activation Time, Expired Time, and Operate. The table contains 7 rows of target data.


Display Customer Information

The screenshot shows the GPS system interface with the 'DEMO' customer information displayed in a yellow box. The details are: Login Account: 123456, Roles: End User, Target Count: Stock (7) Purchase (27), Contacts: 999GPS, Tel/Mob: , Address: . Below this is a table of targets with columns: NO., Target Name, IMEI Number, SIM Card NO., Type, Create Time, Activation Time, Expired Time, and Operate. The table contains 7 rows of target data.

The right top is the customer information, Name / Contact information etc.

Change Customer Information

Click “Business” and click the “+” in the front of the customer name in the command list, the sub-account name will display in the list, then click the customer name and click “Information”, the customer information will display like the following page:

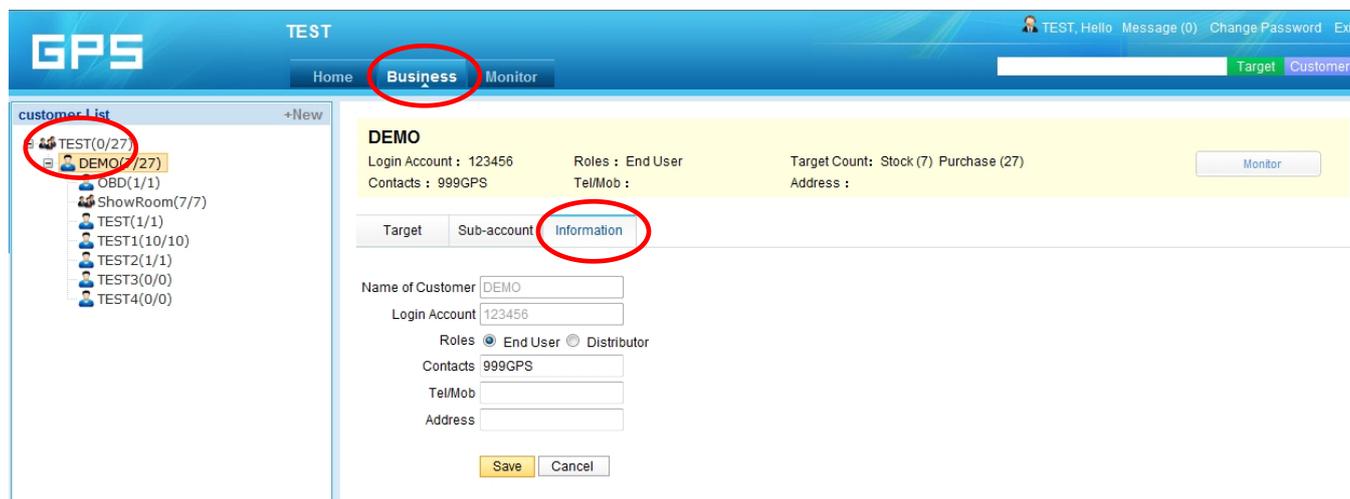

In this page, customer information can be changed and update. Like Contacts / Telephone / Mobilephone / Address etc. Click “Save” to save the changing.

Target / Device Management

Click “Business” and click the customer name in the command list, and then click “Target”, the target device under this customer will display, then the operation like move / sale device, change the device information, change expired date, reset the device password can be done.

In the target device list, the create time is the time of super user add the device to the platform, and the activation time is the time of the device upload the location for the first time (The device is active by uploading location to platform), and the expired time is the expired date of the platform for this device. Sale / Edit / More menu can move / sale the device to sub-account, Edit can edit device

information, and More can update the expired date and reset device password.

The screenshot shows the 'GPS' system interface. At the top, there's a navigation bar with 'Home', 'Business', and 'Monitor' tabs. The 'Business' tab is active. On the left, a 'customer List' sidebar shows a tree view with 'TEST(0/27)' expanded to 'DEMO(7/27)', which includes sub-items like 'OBD(1/1)', 'ShowRoom(7/7)', and 'TEST(1/1)'. The main area displays 'DEMO' details: Login Account: 123456, Roles: End User, Target Count: Stock (7) Purchase (27), Contacts: 999GPS, TelMob, and Address. Below this is a 'Target' table with columns: NO., Target Name, IMEI Number, SIM Card NO., Type, Create Time, Activation Time, Expired Time, and Operate. The table contains 7 rows of target data. The 'Operate' column for the first row (NO. 1) has a red box around the 'Sale | Edit | More' links.

NO.	Target Name	IMEI Number	SIM Card NO.	Type	Create Time	Activation Time	Expired Time	Operate
1	CCTR803	CW1111C00000003	18340061589	CC800	2013-09-28	2013-09-28	2024-09-25	Sale Edit More
2	CCTR-828	1451211641	15919955722	TQ	2013-09-28	2013-09-28	2024-09-25	Sale Edit More
3	CCTR-808S	CW8888C88998888	18340046296	CC800	2013-10-02	2013-10-02	2024-09-29	Sale Edit More
4	CCTR-828	1451211887		TQ	2013-10-22	2013-10-22	2024-10-19	Sale Edit More
5	TR828-NEW	1451210915	18340062829	TQ	2013-11-07	2013-11-22	2014-11-22	Sale Edit More
6	CCTR-820-FX	1451210909	18340073732	TQ	2013-11-07	2013-11-07	2024-11-04	Sale Edit More
7	CCTR-820-HG	1451210874	18340046791	TQ	2013-11-14	2013-11-21	2014-11-21	Sale Edit More

Sale Device to Customer

Click the command “Sale” behind the device in the target list, the sale window will pop up, select the customer name you will sale this device to, you can change the target name, Sim card number, and you can write some remark in the remark field, and then click “Save”, the selected device is sold and moved to the selected customer. This command only operate 1 device one time.

This screenshot shows the same 'GPS' system interface as the previous one, but with a 'Sale' dialog box open. The dialog box has a title bar 'Sale' and a close button. It contains the following fields: 'Customer Move' (a dropdown menu showing 'ShowRoom(7/7)'), 'IMEI Number' (text input with 'CW1111C00000003'), 'Target Name' (text input with 'CCTR803'), 'Membership' (text input with 'DEMO(7/27)'), and 'SIM Card NO.' (text input with '18340061589'). There is also a 'Remark' text area and 'Save' and 'Cancel' buttons at the bottom. In the background, the 'Target' table is visible, and the 'Sale | Edit | More' link for the first row is circled in red.

Note: When sale a device to a customer, just create a new account name,

and operate the “Sale” or “Move” command to move the selected device to the new account is OK, the device will be active automatically when the device is powered on and uploading location to platform.

Edit Device information

Click the command “Edit” behind the device in the target list, the device information window will pop up, you can change the target name, Sim card number, car plate number, contacts, overspeed alarm speed, contact telephone & mobile phone , average fuel consumption (unit L/100Km , it is used to calculate probable fuel consumption), select device icon display on the map, and also you can write some remark in the remark field, and then click “Save”, the selected device information is changed. This command only operate 1 device one time.

The screenshot displays the GPS management software interface. At the top, there is a navigation bar with 'GPS' logo, 'TEST' title, and user information 'TEST, Hello'. Below this are tabs for 'Home', 'Business', and 'Monitor'. A sidebar on the left shows a 'customer List' with a tree view containing 'TEST(0/27)' and 'DEMO(7/27)'. The main area shows details for the 'DEMO' target, including 'Login Account: 123456', 'Roles: End User', 'Target Count: Stock (7) Purchase (27)', 'Contacts: 999GPS', and 'Tel/Mob:'. A 'Device Information' dialog box is open, showing fields for 'IMEI Number', 'Type', 'Expired Time', 'Activation Time', 'Target Name', 'SIM Card NO.', 'License Plate No.', 'Contacts', 'Icon', and 'Remark'. The 'Operate' column in the background table has 'Sale | Edit | More' links, with 'Edit' circled in red. The dialog box has 'Save' and 'Cancel' buttons at the bottom.

Reset Password of the Device

Click the command “More” behind the device in the target list, a menu will pop up, click the “Reset Pwd”, the reset password warning window will pop up, click “OK” to confirm the operation, and the success information will display. And the

password of this device is reset to 123456, user can change the password after login the platform with the IMEI and this password. This command only operate 1 device one time.

Note: The device password is used to login the platform with the IMEI(ID or SN) name, after login, it only can track the single device, this password is not the password used to login the platform with the login account name, use login account name to login platform can track all the device under this account.

The screenshot shows the 'GPS' platform interface. On the left is a 'customer List' tree with 'TEST(0/27)' expanded to show 'DEMO(7/27)' and its sub-items. The main area displays 'DEMO' details: Login Account: 123456, Roles: End User, Target Count: Stock (7) Purchase (27). Below this is a table with columns: NO., Target Name, IMEI Number, SIM Card NO., Type, Create Time, Activation Time, Expired Time, and Operate. The 'Operate' column for row 2 has a 'Reset Pwd' link circled in red.


NO.	Target Name	IMEI Number	SIM Card NO.	Type	Create Time	Activation Time	Expired Time	Operate
1	CCTR803	CW1111C00000003	18340061589	CC800	2013-09-28	2013-09-28	2024-09-25	Sale Edit Reset Pwd Move
2	CCTR-828	1451211641	15919955722	TQ	2013-09-28	2013-09-28	2024-09-25	Sale Edit Move
3	CCTR-808S	CW8888C88998888	18340046296	CC800	2013-10-02	2013-10-02	2024-09-29	Sale Edit Move
4	CCTR-828	1451211887		TQ	2013-10-22	2013-10-22	2024-10-19	Sale Edit Move
5	TR828-NEW	1451210915	18340062829	TQ	2013-11-07	2013-11-22	2014-11-22	Sale Edit More
6	CCTR-820-FX	1451210909	18340073732	TQ	2013-11-07	2013-11-07	2024-11-04	Sale Edit More
7	CCTR-820-HG	1451210874	18340046791	TQ	2013-11-14	2013-11-21	2014-11-21	Sale Edit More

This screenshot is identical to the one above, but with a modal dialog box overlaid on the table. The dialog box has a yellow warning icon and the text 'Password reset successfully!' with a '确定' (OK) button.

Move Device

Click the command “More” behind the device in the target list, a menu will pop up, click the “Move”, the move device window will pop up, select the customer account name you want move this device to, click “Save” to confirm the moving. Then this device is moved to the selected customer. This command only operate 1 device one time.


Note: The “Move” command and “Sale” command all can move the device to selected customer, the only different is the “sale” command can change the device information, but the “Move” command only move the device to the selected customer.

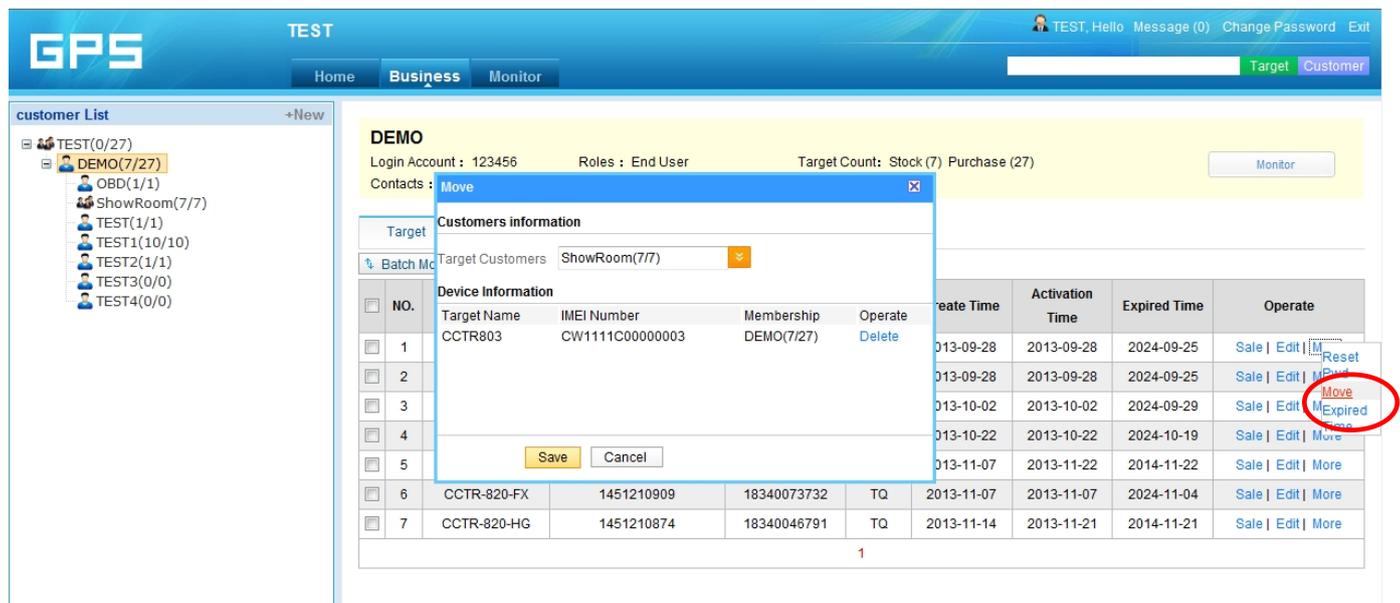

Update Expired Time


Click the command “More” behind the device in the target list, a menu will pop up, click the “Expired Time”, the update expired time window will pop up, select the one year, two year or life long (life time free is 10 years expired time), or you can specify how many days, then click “Save” to confirm, if the device was active, the the expired time will be the expired day month year, if the device is not active, the expired time will add to the “Credit recharge” point, 1 credit recharge point is 1 day,

is active, the credit charge point will change to expired day month year. This command can be used to update the selected fleet or group devices expired time one time, the function is same with the “Update Expired Time”.

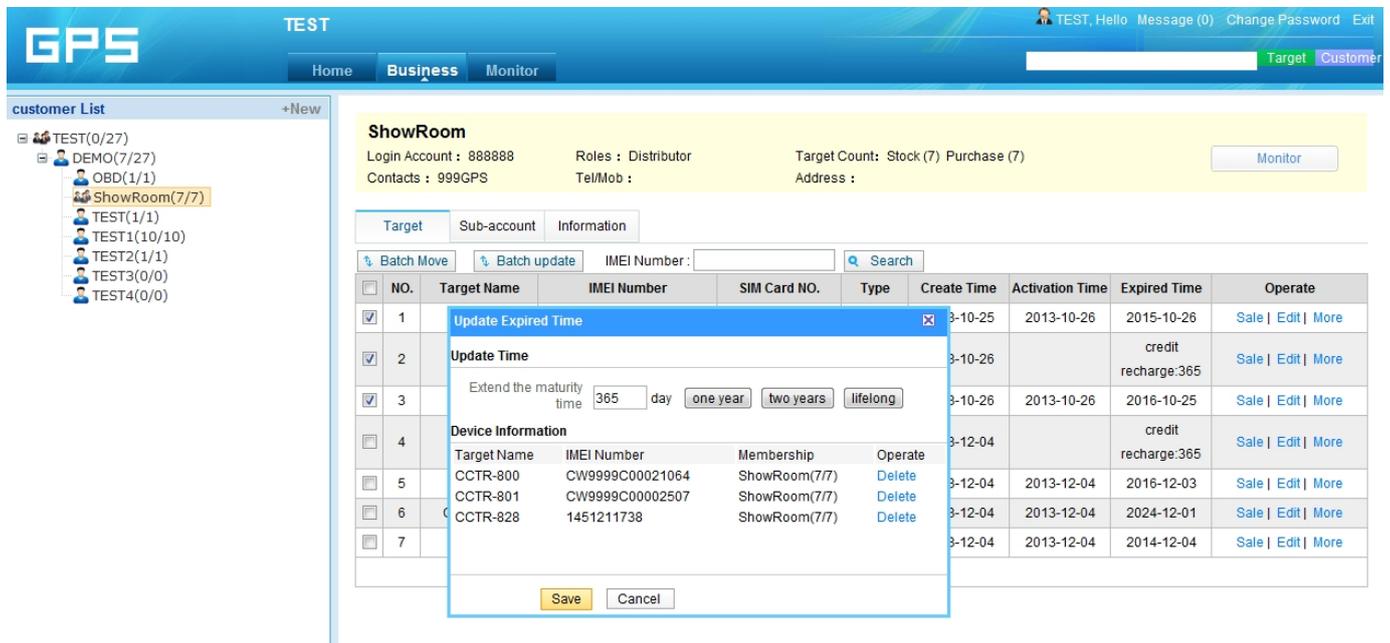

Batch Move Device to Sub-account

Click the frame before the device in the target list to select it, and then click the “Batch Move” command upper the device, select the customer name you want move to, Click “Save” will move the selected device to the selected customer. This command can be used to move selected devices to new fleet or user.

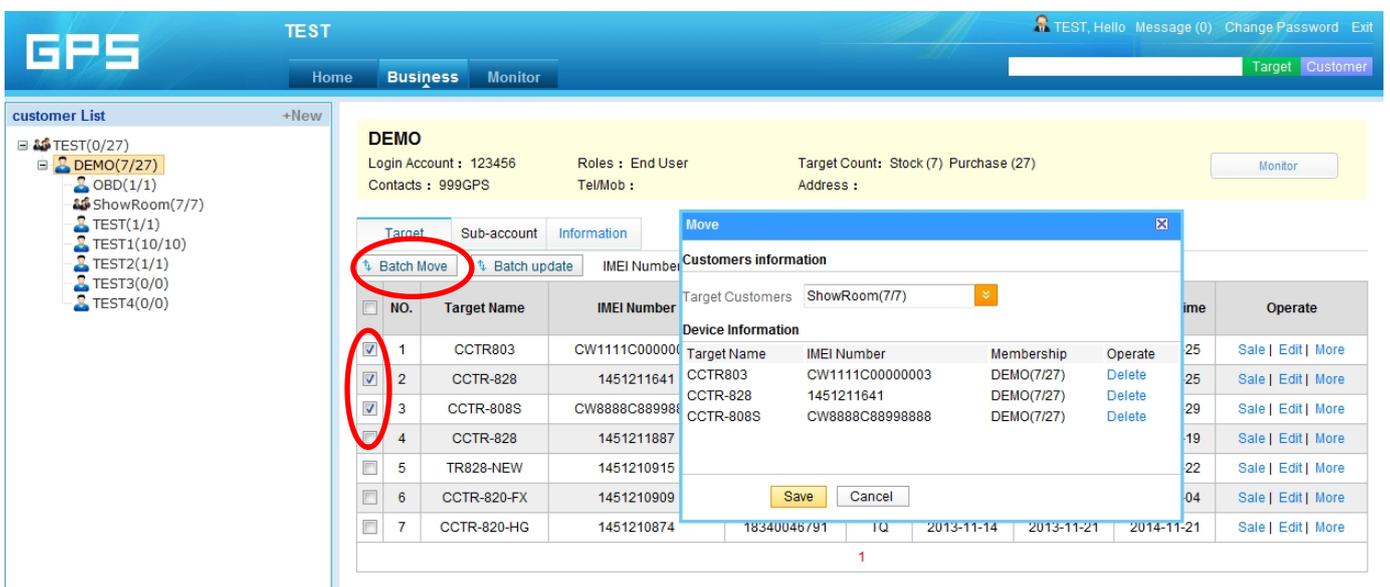

Monitor Sun-account Selected Device

Click the customer name in the customer list to select the customer device you like to monitor, and then click the “Monitor” in the top right of the page, or click the “Monitor” menu in the top of the page, a new monitor window for the selected customer device will pop up, the operation of this page is same with the normal end user, you can check device current location, playback history tracking, export running report etc.

The screenshot shows the 'TEST' user interface. The top navigation bar includes 'Home', 'Business', and 'Monitor' (circled in red). The left sidebar shows a 'customer List' with 'ShowRoom(7/7)' selected (circled in red). The main content area displays 'ShowRoom' details: Login Account: 888888, Roles: Distributor, Target Count: Stock (7) Purchase (7), Contacts: 999GPS, Tel/Mob: , Address: . A 'Monitor' button is circled in red. Below this is a table of devices:

NO.	Target Name	IMEI Number	SIM Card NO.	Type	Create Time	Activation Time	Expired Time	Operate
1	CCTR-800	CW9999C00021064	18340073171	CC800	2013-10-25	2013-10-26	2015-10-26	Sale Edit More
2	CCTR-801	CW9999C00002507	18340073235	CC800	2013-10-26		credit recharge:365	Sale Edit More
3	CCTR-828	1451211738	18340073717	TQ	2013-10-26	2013-10-26	2016-10-25	Sale Edit More
4	CCTR-810	CW9999C00018133	18340073252	CC800	2013-12-04		credit recharge:365	Sale Edit More
5	CCTR-811	CW9999C00021850	18340073321	CC800	2013-12-04	2013-12-04	2016-12-03	Sale Edit More
6	CCTR-808S	CW8888C889888888	18340073536	CC800	2013-12-04	2013-12-04	2024-12-01	Sale Edit More
7	CCTR-803	CW9999C00017594	18340073251	CC800	2013-12-04	2013-12-04	2014-12-04	Sale Edit More

The screenshot shows the 'ShowRoom' user interface. The top navigation bar includes 'Monitor', 'Statistics', and 'More'. The left sidebar shows 'ShowRoom(7/7)' selected. The main content area displays a map of the region around Dongguan and Shenzhen. A device labeled 'CCTR-828' is highlighted on the map. The left sidebar shows a list of devices with their status: CCTR-800 (Offline), CCTR-801 (Logged Off), CCTR-803 (Offline), CCTR-808S (Offline), CCTR-810 (Logged Off), CCTR-811 (Logged Off), and CCTR-828 (Stop).

How to Sale a device to a customer

- 1. Create a new user customer name and login name(Normal is end user, also can be distributor (Sub-distributor)).**
- 2. Select the sold device, and operate the “Sale” or “Move” command to move the selected device to the new created account.**
- 3. Selected the sold device, update expired time / change customer information etc can be operated.**
- 4. The device will be active automatically when the device is powered on and uploading location to platform.**